Page 1 of 3

01163049 A

(61)

(11) Publication number:

## Generated Document.

## PATENT ABSTRACTS OF JAPAN

(51) Intl. Cl.: B29D 17/00 B29C 39/22 G11B 3/70 G11B

(21) Application number: 62283062

(22) Application date: 11.11.87

:

(30) Priority:

27.06.89 (43) Date of application publication:

(84) Designated contracting states:

(74) Representative:

(72) Inventor: TAKAHASHI SATOSHI

(71) Applicant: NIKKA ENG KK

MANUFACTURING 54) DISK

APPARATUS

(57) Abstract:

provided to the upper surface thereof wherein an upper mold composed of are arranged in opposed relationship PURPOSE: To obtain a disk without using a disc base plate, by a method stand having a resin outflow port a transparent plate and a stamper

so as to be able to relatively approach

and separate each other and a light

https://www.delphion.com/cgi-bin/viewpat.cmd/JP01163049A2

PAGE 66/96 \* RCVD AT 9/21/2004 7:19:06 PM [Eastern Daylight Time] \* SVR:USPTO-EFXRF-1/1 \* DNIS:8729306 \* CSID: \* DURATION (mm-ss):21-00

Page 2 of 3


01163049 A

emitter is provided above the upper mold while the upper mold is made finely movable up and down with respect to the upper mold base for supporting the upper mold.

ring 13 is rotated, and the upper mold action of the thread stripes 12, 14. An direction and opened upwardly at the hose 15. A resin upwardly flows out interior and the lower end thereof is connected to a resin feeder 15 and a upper end thereof is provided to the is composed and engaged with a ringprovided above the upper mold 1. A shaped upper mold frame 11 made of to the outer peripheral surface of the mold frame 11 and screwed with the gear 15. When the gear 15 is rotated a metal. A thread stripe 12 is formed base 10. A tooth shape 16 is formed ultraviolet ray irradiation lamp 9 is resin passage 5 piercing in a length peripheral surface of the rotary ring CONSTITUTION: An upper mold 1 by operating a motor 17, the rotary frame 11 and the upper mold 1 are rotary ring 13 to be meshed with a finely moved up and down by the to the outer periphery of the upper 13 incorporated in an upper mold thread stripe 14 on the inner from one center place.

COPYRIGHT: (C)1989, JPO& Japio

Page 3 of 3

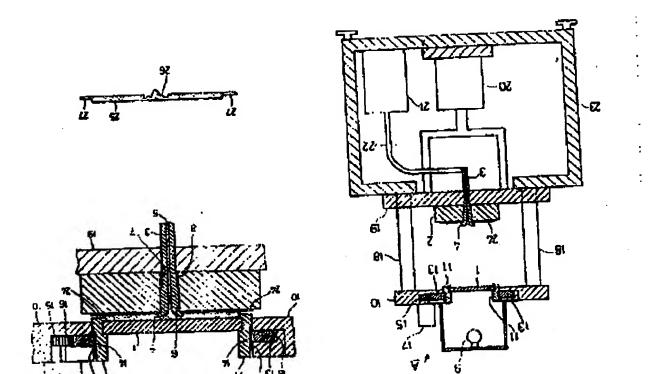

## This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:
☐ BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
☐ FADED TEXT OR DRAWING
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
<u> </u>

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.